

10-Page Tutorial

WIDE ADJUSTABLE COLLAR

Wide Pet Collar Sewing Guide



This guide teaches you how to sew a strong, wide adjustable collar in three standard selling sizes. Designed for larger pets or a bold boutique look, this collar delivers comfort, durability, and standout style.

SIZES (NECK)

S	Small	10–14 in
M	Medium	14–18 in
L	Large	18–22 in

YOU'LL NEED



Heavy Duty Thread



Fabric Scissors



2" (50 mm) Wide Webbing



1½" (38 mm) Buckle



1½" (38 mm) Welded D-Ring



1½" (38 mm) Tri-Glide



Keeper Loop

TOOLS, MATERIALS & FINISHED DESIGN

Wide Adjustable Collar Sewing Guide

-  **Wide Webbing**
2" (50 mm) wide for strength and durability.
-  **Side-Release Buckle**
1½" (38 mm) wide.
-  **Tri-Glide Slider**
1½" (38 mm) for easy adjustment.
-  **Welded D-Ring**
1½" (38 mm) for secure leash attachment.
-  **Heavy-Duty Thread**
Polyester or nylon for strength.
-  **Sewing Clips or Pins**
Hold layers securely.
-  **Ruler or Tape Measure**
For accurate measuring.
-  **Lighter or Heat Tool**
Seal webbing ends to prevent fraying.
-  **Sewing Machine and Fabric Scissors**
Use a strong machine and sharp scissors for clean results.

FINISHED DESIGN



SELLER TIP



Wide collars are popular for larger pets and boutique-style listings. Matching wide hardware gives the best finished look.

SIZE CHART & CUT LIST

Standard selling sizes for the collar

Size	Neck Fit (in)	Main Strap Length (in)	Keeper Strip Length (in)	Collar Width (in)
S Small	10–14	18	4	1.25
M Medium	14–18	22	4.5	1.5
L Large	18–22	26	5	1.5



Fixed buckle-end fold-back: 1.75 in (all sizes)



Tail-end turn-under: 1 in (all sizes)

S
Small

MAIN STRAP



KEEPER STRIP



M
Medium

MAIN STRAP



KEEPER STRIP




L
Large

MAIN STRAP



KEEPER STRIP

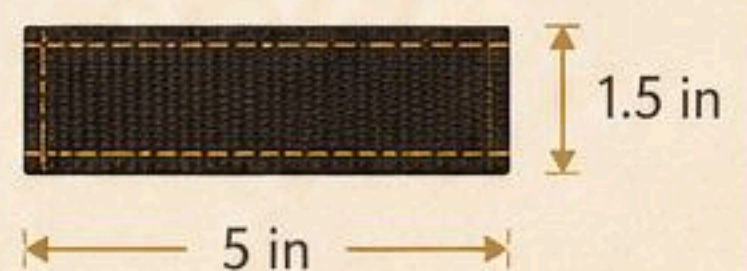

The wider body gives a bold look and distributes pressure across more surface area.

CUT & PREP THE WEBBING

Prepare the pieces neatly before assembly




Cut one main strap to the length from page 3.



Cut one keeper strip to the matching size from page 3.



Lightly heat-seal all cut ends to stop fraying.

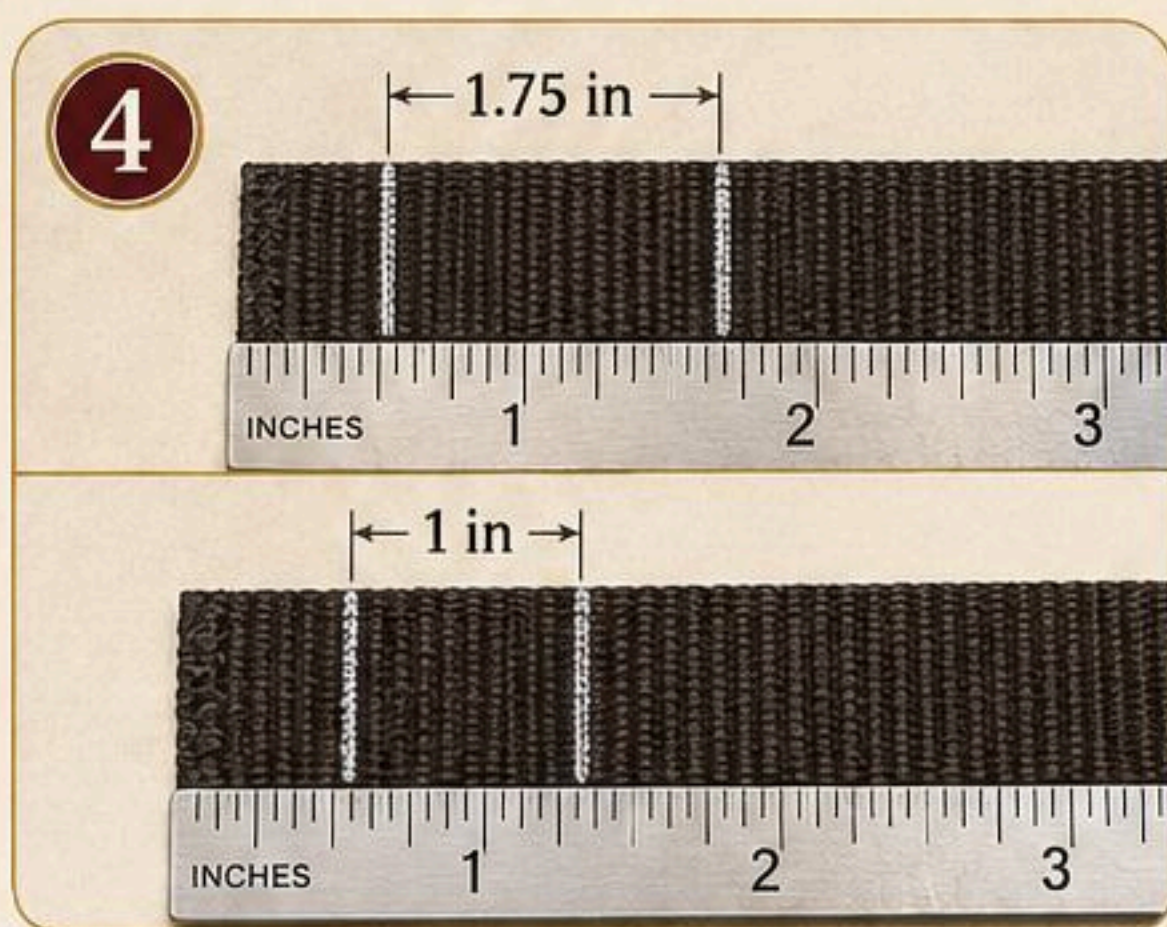

Mark the fixed buckle-end fold line at 1.75 in on one end of the main strap and mark a 1 in turn-under line on the opposite tail end.

TIP

Accurate cutting and sealed ends make the collar easier to sew and more professional.

SEW THE FIXED BUCKLE END

Attach the female buckle and D-ring

1



Slide one female side-release buckle half onto the marked fixed end of the main strap.

2



Slide the welded D-ring onto that same end so it sits next to the buckle.

3



Fold the strap back by 1.75 in around the buckle slot and D-ring, keeping everything flat and untwisted.

4



Stitch a strong box-X through the folded end to lock the buckle and D-ring in place.

FIXED END COMPLETED



Wide collars need a firm box-X stitch because the wider strap carries more load.

BUILD THE ADJUSTABLE END

Add the tri-glide and male buckle

1

Slide the tri-glide slider onto the free end of the strap.



2

Pass that same strap end through the male side-release buckle half.



3

Thread the strap end back through the tri-glide correctly so the collar becomes adjustable.



4

Fold the raw tail end under by 1 in and topstitch that turn-under neatly to create a finished tail end while leaving the strap free to slide.



ADJUSTABLE END COMPLETED



NOTE: KEEP THE STRAP FLAT (NOT TWISTED)



CORRECT
Flat strap
slides smoothly.



WRONG
Twisted strap
can cause fit
and wear issues.



MAKE & ADD THE KEEPER LOOP

Control the extra adjustment tail neatly

1

Take the keeper strip piece from page 3.

**2**

Overlap its ends by about 0.5 in to form a small loop and stitch it securely.

**3**

Slide the finished keeper loop onto the adjustable tail section of the collar near the buckle.

**4**

Tuck the loose tail under the keeper loop so the extra length lies flat and tidy.



SELLER NOTE


A keeper loop gives your collar a cleaner premium look and keeps the extra tail from flopping around.



ADJUST & TEST THE COLLAR

— Check movement, fit range, and hardware position —

- 1** Buckle the collar closed and confirm the side-release buckle clicks securely.

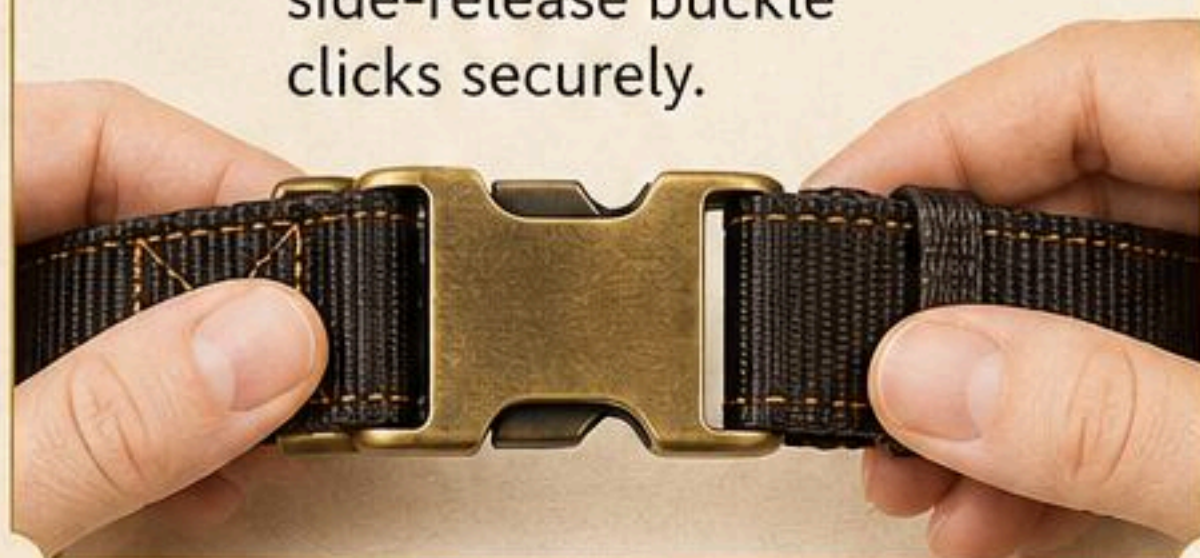

- 2** Slide the tri-glide to make the collar smaller or larger and confirm the adjustment moves smoothly.



- 3** Pull gently on the D-ring and stitched fixed end to confirm the hardware stays secure.



- 4** Tuck the tail under the keeper and confirm the collar lies flat with no twists.



wide strap
spreads
pressure



D-ring faces
outward

keeper
controls tail



TIP

For selling, make sure each size reaches the full listed neck range before packaging.

FINISH THE COLLAR

Do the final cleanup and inspection

1

Trim loose threads from every stitched area.



2

Check the box-X stitching on the fixed buckle end and the seam on the keeper loop.



3

Smooth any sealed strap edges and wipe the hardware clean.



4

Buckle and unbuckle the collar and test that the tri-glide adjusts smoothly.



TIP

A neat finish improves both safety and sale value.



CHECK THE SIZES & QUALITY CHECK

Final summary



Small



Medium



Large

Size	Neck Fit (in)	Main Strap (Total Length)	Keeper Strip (Each)	Collar Width
S Small	10–14 in	18 in	4 in	1.25 in
M Medium	14–18 in	22 in	4.5 in	1.5 in
L Large	18–22 in	26 in	5 in	1.5 in

QUALITY CHECKLIST

- stitches straight
- buckle clicks securely
- D-ring secure
- tri-glide adjusts smoothly
- keeper holds excess tail
- no fraying visible

CARE INSTRUCTIONS

- spot clean with mild soap and water
- air dry flat
- do not bleach
- inspect stitching regularly

SELLER NOTE

Include the neck fit range, collar width, webbing material, and hardware finish in your listing so buyers know exactly what they are purchasing.